


Shrinkable Sleeve



NU-SHRINK

NU-SHRINK is a heat-shrinkable tubular sleeve designed to highly protect components against abrasion and other risks.

It is a weave sleeve made of modified polyethylene monofilament combined with polyester multifilament. An impregnation has been added to prevent end fray.

NU-SHRINK is very flexible and yet highly tough.

The thermal fixation guarantees high fitting accuracy.

This allows to tightly fit to irregular shapes, even with narrow bend radius.

NU-SHRINK is well suited for automotive applications to protect wires, wire harnesses, hoses, tubes and other components in the under-the-hood environment, where mechanical risks are like to occur.


Characteristics

- **Colors:** standard color is black.
- **Shrink ratio:** max. 2:1.

Physical properties	Specification	Unit	Value
Continuous temperature of use (3000h)	-	°C (°F)	-40/125(-40/260)
Peak temperature	-	°C (°F)	150 (302)
Abrasion resistance	DIN EN ISO 12947 2	rpm	150,000
Abrasion resistance	TL 52668	-	No relevant damage
Flammability	SAE J 369	-	self-extinguishing
Chemical resistance	SAE J 2192	Resists to chemicals and automotive fluids (oils, coolant, battery liquid, brake fluid, fuels, windsheild washer...)	

Dimensions

Designation	Minimum ID supplied (W) (mm)	Maximum Ø recovered (ID) (mm)
NU-SHRINK 06 - 03	6	3
NU-SHRINK 12 - 06	12	6
NU-SHRINK 20 - 10	20	10
NU-SHRINK 25 - 12.5	25	12.5
NU-SHRINK 30 - 15	30	15
NU-SHRINK 34 - 17	34	17
NU-SHRINK 40 - 20	40	20
NU-SHRINK 50 - 25	50	25
NU-SHRINK 60 - 30	60	30
NU-SHRINK 70 - 35	70	35
NU-SHRINK 80 - 40	80	40
NU-SHRINK 90 - 45	90	45
NU-SHRINK 100 - 50	100	50
NU-SHRINK 110 - 55	110	55

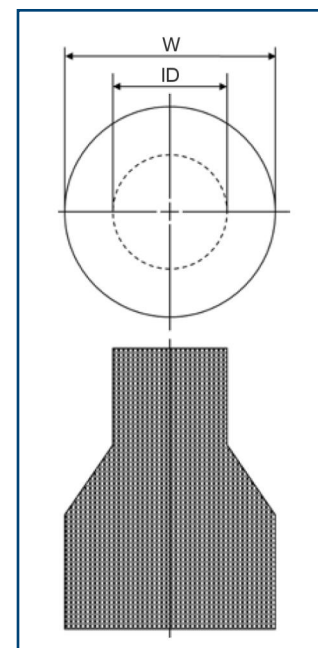

Approvals

- Direct: General Motors.
- Via Tier-1: Audi, BMW, Seat, Skoda, Volkswagen.

Packaging

NU-SHRINK is delivered in coils or in cut lengths upon request.



Data and photos for information only. Delfingen makes no warranties as to the accuracy or completeness of this information. Delfingen reserves the right to make changes in materials or processing without notification.

Corporate Headquarters: DELFINGEN Industry S.A., Rue Emile Streit, 25340 Anteuil, France

Tel: +33 (0)3 81 90 73 00 • delfingen@delfingen.com

www.delfingen.com